
STAINLESS STEEL MARINE

316-NM Stainless Steel Imperial Lifting Eye Nuts

Family: FAM-S0322-I | Material: 316-NM Stainless Steel | Thread / bore: UNC | Revised October 16, 2026

Drop-forged lifting eye nuts with UNC threads. A is the nominal thread size. B, C and D describe the eye opening as shown in the drawing; E is base height. X, Y and Z are overall dimensions.

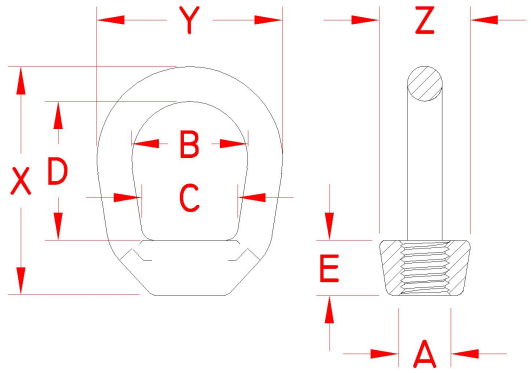

ITEM	A thread	B	C	D	E	X height	Y length	Z width	WLL lb	WT lb
S0322-0007	1/4"	0.75"	0.59"	1.06"	0.38"	1.70"	1.26"	0.58"	460	0.08
S0322-0008	5/16"	0.75"	0.59"	1.06"	0.38"	1.70"	1.26"	0.58"	Confirm	0.08
S0322-0010	3/8"	1.25"	1.00"	1.50"	0.63"	2.50"	2.00"	0.93"	1,160	0.32
S0322-0013	1/2"	1.25"	1.00"	1.50"	0.63"	2.50"	2.00"	0.93"	2,150	0.28
S0322-0016	5/8"	1.50"	1.19"	2.00"	0.69"	3.18"	2.50"	1.15"	3,440	0.57
S0322-0020	3/4"	1.75"	1.25"	2.38"	0.88"	3.82"	3.00"	1.30"	5,140	0.93

Specification confirmation required: S0322-0008 (5/16 in.): Suncor's webpage lists WLL 480 lb; its PDF lists 780 lb. Working load limit requires written confirmation from Suncor before load selection or use.

Dimensions are nominal (+/-3%) and subject to change. Inch dimensions unless the A column gives a metric thread designation. WLL = working load limit; WT = unit weight. This SSM reference sheet is not a manufacturer certification.

Sources checked October 16, 2026: Suncor product page | Suncor specification PDF. Drawing reproduced from Suncor.