


SSM

316 Stainless Steel Double-Shank Balls

Family series S0756 | Grade 316 stainless steel

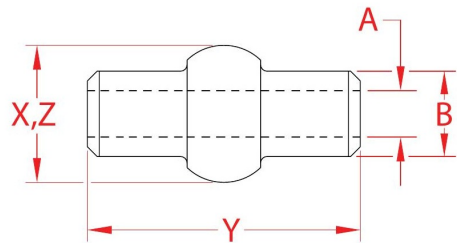

S0756 double-shank balls are precision-machined Grade 316 stainless steel cable fittings for marine, architectural and industrial assemblies.

Choose the exact ordering SKU for the wire diameter. Machine swaging is required; verify the finished shank and ball dimensions.

Technical Specifications

SKU Number	Wire (A)	B Before	B After	Ball Before	Ball After	X	Y	Z	Weight
S0756-0001	1/16 in.	0.13 in.	0.11 in.	0.21 in.	0.19 in.	0.21 in.	0.36 in.	0.21 in.	0.01 lb./100
S0756-0002	3/32 in.	0.16 in.	0.14 in.	0.28 in.	0.25 in.	0.28 in.	0.53 in.	0.28 in.	0.4 lb./100
S0756-0003	1/8 in.	0.22 in.	0.19 in.	0.35 in.	0.32 in.	0.35 in.	0.69 in.	0.35 in.	0.6 lb./100
S0756-0004	5/32 in.	0.25 in.	0.22 in.	0.42 in.	0.38 in.	0.42 in.	0.85 in.	0.42 in.	0.01 lb.
S0756-0005	3/16 in.	0.29 in.	0.26 in.	0.49 in.	0.44 in.	0.49 in.	1.01 in.	0.49 in.	0.01 lb.
S0756-0007	1/4 in.	0.40 in.	0.35 in.	0.62 in.	0.57 in.	0.62 in.	1.34 in.	0.62 in.	0.04 lb.
S0756-0009	5/16 in.	0.48 in.	0.41 in.	0.76 in.	0.69 in.	0.76 in.	1.66 in.	0.76 in.	0.07 lb.

Dimensions are nominal and may change without notice. Confirm wire-rope compatibility, swaging procedure, finished dimensions and installation requirements before ordering or placing an assembly into service.